


CONDUCTOR CONSTRUCTION (N/mm):  
41/0.254AS

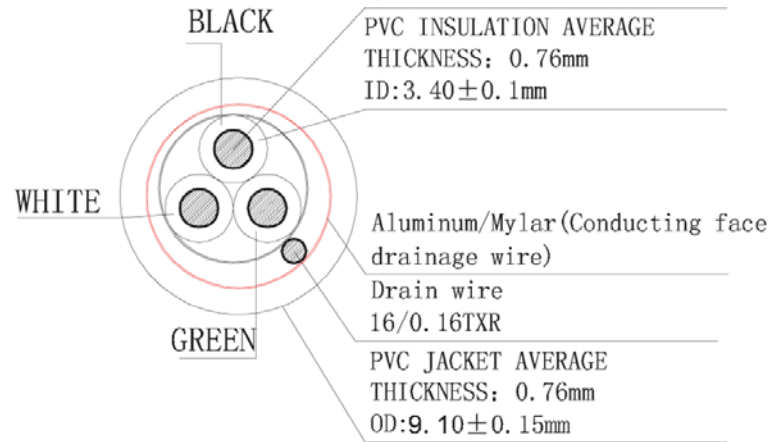

**Material:**

- E243929(UL) SJT 3 x 16AWG(1.31MM<sup>2</sup>) VW-1 Shielded, 60°C 300V - CSA 228191 SJT 3 x 16AWG(1.31MM<sup>2</sup>) FT2 Shielded 60°C 300V -LF-
- Jacket Color: Black
- E- Green; L - Black; N - White

**Electrical:**

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1						Name	Item No.	
TOLERANCE							Drawn	12.27.11	
X.X	±0.40						Chappell	<b>AK500/16-OE-5-1.5</b>	
X.XX	±0.25					Approved			
X.XXX	±0.15								
Angle	±3°								
								Title	Power Cord - SJT, 60°C, Shielded, Open End, 16AWG, 1.5 Meters
								Drawing No.	
								<b>rev00</b>	
				Modification	Date	Name			

