

5

4

3



2

1



SPECIFICATION


Performance level	PL2
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

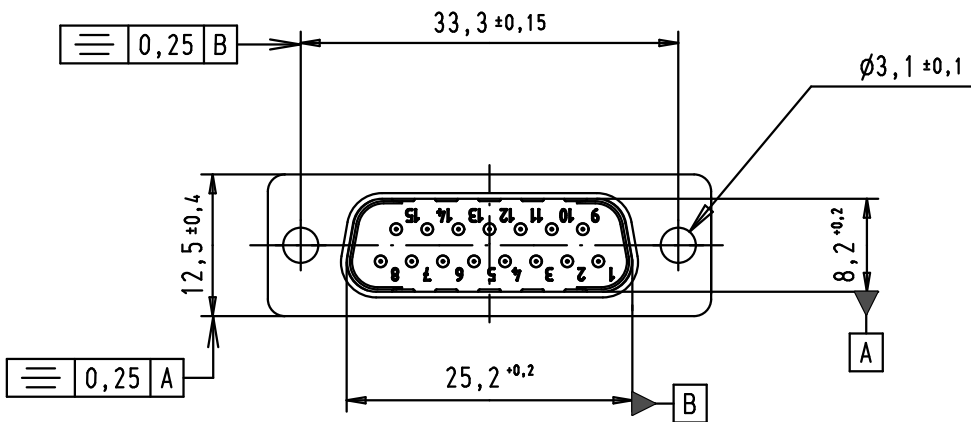

Solder buckets for AWG 20 Max

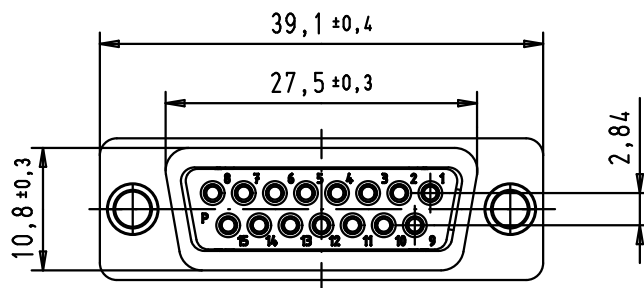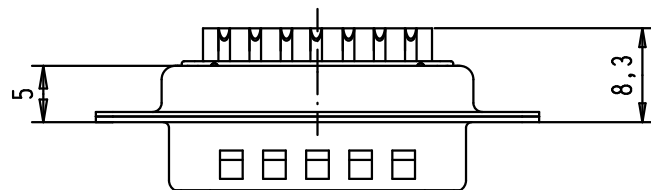

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight 15 Poles, solder buckets, with dimples and holes	Mo?Mstab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.	12/01/12	JB			
			Stand.					
36283	12/01/12	SD				HARTING EURL F-95972 Paris	TB 09642217240	Blatt/ Page 1 / 1
33267	17/11/05	JMDR						
31058	8-JUL-02	CV						
Mod.	Dat.	Name					Sub.	

D

C

B

A